





Ceiling LED  
Tile




Ceiling LED Tile details

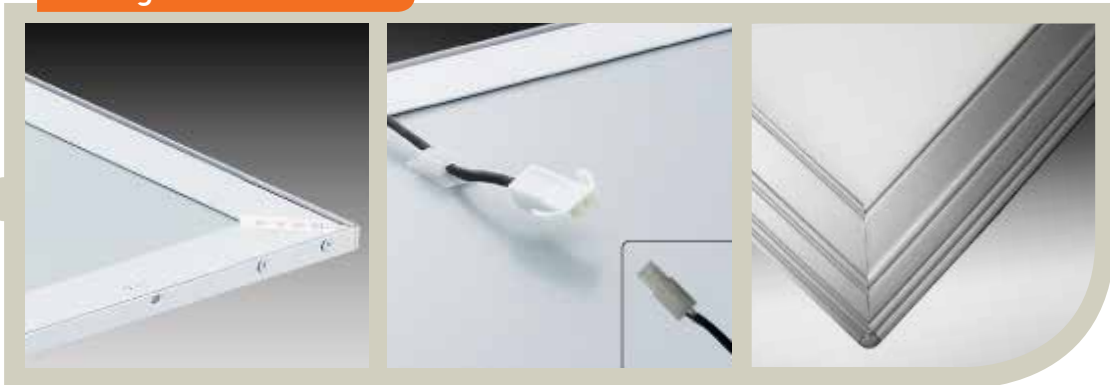


- Manufactured with Samsung 5630 SMD LEDs. 
- CRI : 80
- Efficiency: 70lm/W
- Delivered with high efficiency constant current drivers
- Even light distribution

CPSURFMOUNKIT

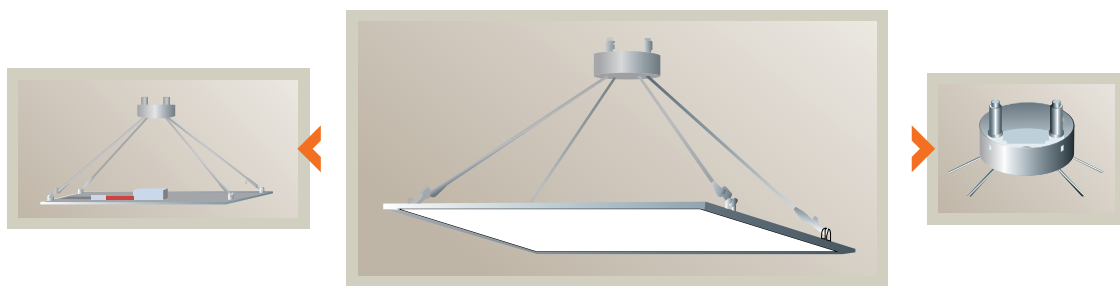

Surface Mounting Kit

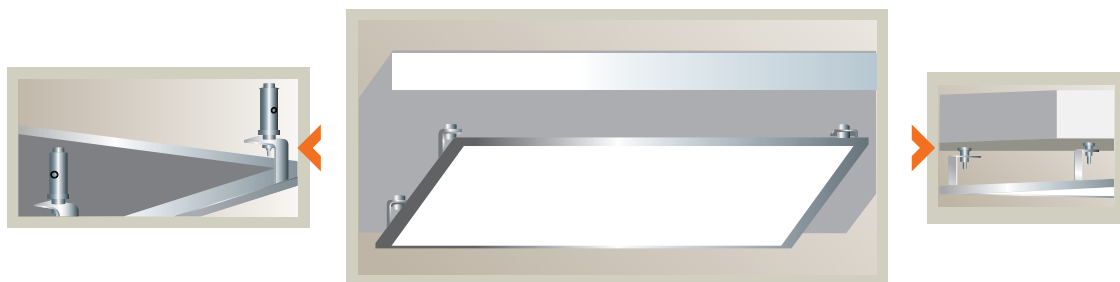

Hanging Mounting Kit

## 30 X 30 CEILING LED TILE

Property	Value
Power	14W
Voltage	230V / ext.PSU
Power Fact.	0.96
Intensity	850lm
Angle	120°
CCT/Color	3000/4000/6000K
IRC	>80 / >80 / >70
IPLevel	IP20
Dimensions	295x295x8mm
Casing Color	White & Silver
Dimmable	No
LED	Jufei 5630 SMD




### References :

REF	Model	GTIN / EAN
CP014NSH030330	30x30cm 850lm 3000K	5420061213143
CP014NSH030340	30x30cm 850lm 4000K	5420061211644
CP014NSH030360	30x30cm 850lm 6000K	5420061213372

## 60 X 60 2800LM CEILING LED TILE

Property	Value
Power	40W
Voltage	230V / ext.PSU
Power Fact.	0.96
Intensity	2800lm
Angle	120°
CCT/Color	3000/4000/6000K
IRC	>80 / >80 / >70
IPLevel	IP20
Dimensions	595x595x8mm
Casing Color	White & Silver
Dimmable	No / Yes
LED	Samsung 5630 SMD

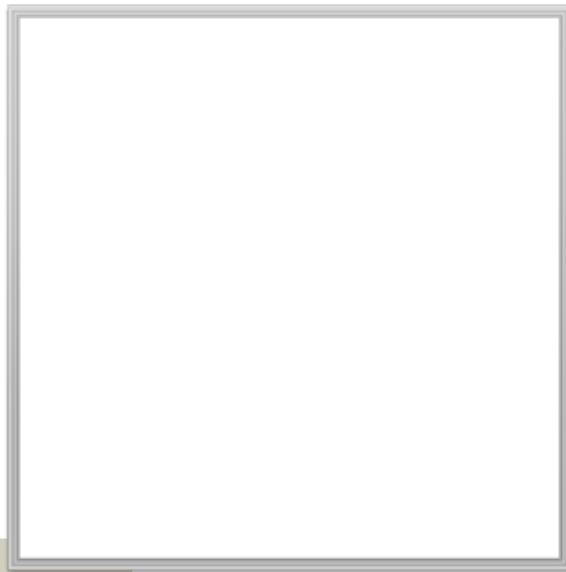


### References :

REF	Model	GTIN / EAN
CG040NSE060630	60x60cm 2800lm 3000K	5420061215604
CG040NSE060640	60x60cm 2800lm 4000K	5420061215611
CG040NSE060660	60x60cm 2800lm 6000K	5420061215628
CG040NDE060630	60x60cm 2800lm 3000K Dimmable	5420061215727
CG040NDE060640	60x60cm 2800lm 4000K Dimmable	5420061215734
CG040NDE060660	60x60cm 2800lm 6000K Dimmable	5420061215741

## 60 X 60 3800LM CEILING LED TILE

Property	Value
Power	55W
Voltage	230V / ext.PSU
Power Fact.	0.96
Intensity	3800lm
Angle	120°
CCT/Color	3000/4000/6000K
IRC	>80 / >80 / >70
IPLevel	IP20
Dimensions	595x595x8mm
Casing Color	White & Silver
Dimmable	No / Yes
LED	Samsung 5630 SMD

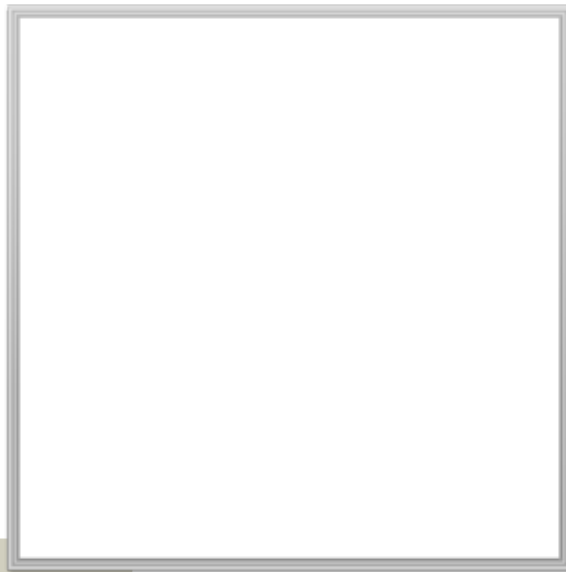

### References :

REF	Model	GTIN / EAN
CG055NSE060630	60x60cm 3800lm 3000K	5420061215666
CG055NSE060640	60x60cm 3800lm 4000K	5420061215673
CG055NSE060660	60x60cm 3800lm 6000K	5420061215680
CG055NDE060630	60x60cm 3800lm 3000K Dimmable	5420061215789
CG055NDE060640	60x60cm 3800lm 4000K Dimmable	5420061215796
CG055NDE060660	60x60cm 3800lm 6000K Dimmable	5420061215802

## 120 X 30 2800LM CEILING LED TILE

Property	Value
Power	40W
Voltage	230V / ext.PSU
Power Fact.	0.96
Intensity	2800lm
Angle	120°
CCT/Color	3000/4000/6000K
IRC	>80 / >80 / >70
IPLevel	IP20
Dimensions	1195x295x8mm
Casing Color	White & Silver
Dimmable	No / Yes
LED	Samsung 5630 SMD



### References :

REF	Model	GTIN / EAN
CG040NSE120330	120x30cm 2800lm 3000K	5420061215635
CG040NSE120340	120x30cm 2800lm 4000K	5420061215642
CG040NSE120360	120x30cm 2800lm 6000K	5420061215659
CG040NDE120330	120x30cm 2800lm 3000K Dimmable	5420061215758
CG040NDE120340	120x30cm 2800lm 4000K Dimmable	5420061215765
CG040NDE120360	120x30cm 2800lm 6000K Dimmable	5420061215772

## 120 X 30 3800LM CEILING LED TILE

Property	Value
Power	55W
Voltage	230V / ext.PSU
Power Fact.	0.96
Intensity	3800lm
Angle	120°
CCT/Color	3000/4000/6000K
IRC	>80 / >80 / >70
IPLevel	IP20
Dimensions	1200x300x8mm
Casing Color	White & Silver
Dimmable	No / Yes
LED	Samsung 5630 SMD



### References :

REF	Model	GTIN / EAN
CG055NSE120330	120x30cm 3800lm 3000K	5420061215697
CG055NSE120340	120x30cm 3800lm 4000K	5420061215703
CG055NSE120360	120x30cm 3800lm 6000K	5420061215710
CG055NDE120330	120x30cm 3800lm 3000K Dimmable	5420061215819
CG055NDE120340	120x30cm 3800lm 4000K Dimmable	5420061215826
CG055NDE120360	120x30cm 3800lm 6000K Dimmable	5420061215833





 spotled